


YC2365I-28-S**4K Human & Vehicle Detection Turret POE IP Camera****Features:**

- ❖ 1/2.7" CMOS sensor
- ❖ 3840x2160 video output
- ❖ Ultra low illumination 0.01Lux
- ❖ Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT, Privacy Mask, Mirror
- ❖ D-WDR, Motion Detection
- ❖ RTSP and Onvif 17.06 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 18pcs SMD IR LEDs, IR distance 20-30 meters
- ❖ 2.8mm F1.6 fixed lens
- ❖ Built-in Mic & PoE
- ❖ Human Detection, Vehicle Detection

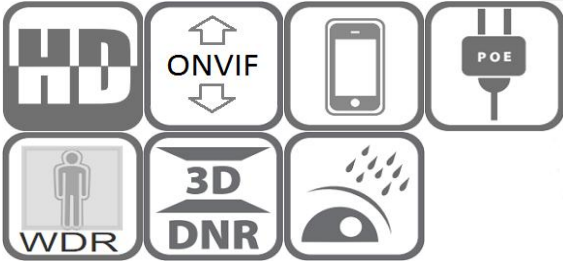

Technical Specifications:

Model	YC2365I-28-S
Camera	
Image Sensor	1/2.7" CMOS Sensor
Effective Pixels	4K (3840x2160)
Electronic Shutter	AUTO, 1/25s ~ 1/10000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
Encode	
Video Standard	H.264/H.265/ H.265+
Video Resolution	Main Stream: 15fps@4K(3840x2160)/25fps@6MP(3072x2048)/5MP(2592x1944), 30fps@4MP/3MP/1080P/720P Sub stream: 30fps@D1/VGA/360P/CIF, etc.
Video Bitrates	64Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
Smart Event	Human Detection Vehicle Detection Motion Detection
IR Led	
IR Led	18pcs SMD IR LEDs
IR Distance	20-30 metres
Lens	
Focal length	2.8mm F1.6 fixed lens
Network Services	
Protocol	HTTP(S)/RTSP/RTMP/FTP/NFS/SNMP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox 32bit ESR, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, PoE
Power Supply	PoE (default), 12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

