


YC2387C-28**8MP 4K ColorVu Turret PoE IP Camera****Features:**

- ❖ 1/2.8" Sony CMOS sensor
- ❖ 4K resolution 3840 x 2160P
- ❖ Low illumination 0.01Lux
- ❖ Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- ❖ D-WDR,Mirror, rotate, Defogging
- ❖ Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- ❖ RTSP and Onvif 17.06 compatible with many third-party NVR
- ❖ H.264/H.265 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Support user authentication, video data encryption
- ❖ Support Alarm Snapshot to Email and FTP
- ❖ Multiply WEB browser IE,Firefox 32bit ESR, PC Client, Mobile APP remote access
- ❖ RJ45 100mbps network port, IEEE802.3af PoE
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 2 pcs Warm Light, Light distance:25-30M
- ❖ **Human body detection, Vehicle detection**
- ❖ **2.8mm F1.0 lens, built-in Mic**

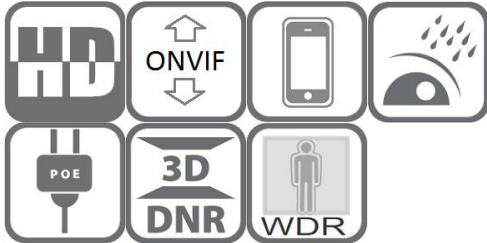

Technical Specifications:

I	YC2387C-28 W608FCB97A
Camera	
Image Sensor	1/2.8" SONY IMX415 CMOS
Effective Pixels	3840 (H) × 2160 (V)
Electronic Shutter	AUTO, 10-10000/min
Min. Illumination	0.001Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Indoor/Outdoor
BLC	Support
DNR	2D/3D DNR
Other	Motion Detection, Privacy Mask, Mirror, flip
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream:20fps@8MP(3840x2160),30fps@6MP(3072x2048)/5MP(2592x1944)/4MP/3MP/1080P/720P,etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a
Built-in Mic	Yes
OSD Overlay	Title and Time overlay
Leds	
Warm lights	2 pcs warm lights
Distance	20-30M
Lens	
Focal length	2.8mm F1.0 lens
Optional Function	
PoE, Mic, Human body detection, Vehicle detection	
Network Services	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	2.6 compatible
General	
Network Port	1-RJ45, 100Mbps
Power Supply	Default: PoE (12V DC ± 10% optional)
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

